

Home 3G

SKU: 473105 MAP: \$169.99

FEATURES

- Boosts 3G signal for a desktop workspace area at home, office, or apartment
- Coverage area up to 1,500 sq. ft.
- For multiple devices and users
- Works on ALL cellular devices with ALL carriers simultaneously
- Enhances talk, text, and basic 3G internet

⚠️ WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



- 3G FAST NETWORK SPEEDS
- UP TO 1,500 sq. ft. COVERAGE
- UP TO +60 dB GAIN
- MULTI-USER WIRELESS BOOSTER

About

The **Home 3G** is weBoost's most affordable cell phone signal booster for indoor coverage. This 3G signal booster gets better voice and data to reduce dropped calls, improved voice quality, faster uploads and downloads. The weBoost Home 3G boosts cell signals up to 32x, enhancing 3G data for homes up to 1,500 sq ft. It is compatible with all US networks including Verizon, AT&T, Sprint, T-Mobile, US Cellular, Straight Talk and more.

All parts are included in the kit and trained support staff on call to assist with the easy DIY installation. The Home 3G comes with a 2-year warranty from manufacturer and a 30-day money back guarantee.

Coverage Area

IF YOUR OUTSIDE SIGNAL IS	YOUR BOOSTED SIGNAL MAY BE
●●●●● -89 AND LOWER About 5 bars	UP TO 1,500 sq. ft.
●●●●○ -90 dB About 3 to 4 bars	UP TO 1,000 sq. ft.
●●○○○ -100 dB About 1 to 2 bars	UP TO 150 sq. ft.
○○○○○ No existing	A signal booster likely will not work

Kit Includes



Home 3G



Outside Panel Antenna (311141)



Inside Desktop Antenna (301211)



Power Supply (850011)



30' + 20' White Low Loss RG6 (75 Ohm) Coax Cables (950630 / 950620)




10" Flat Window Entry Cable (951177)

Specifications

MODEL NUMBER	473105*	
FREQUENCIES	Band 5	850 MHz
	Band 2	1900 MHz
MAX GAIN	60 dB	
IMPEDANCE	50 / 75 Ohm	
POWER	110-240 V AC, 50-60 Hz, 8 W	
CONNECTORS	SMA Female / F-Female	
BOOSTER DIMENSIONS	6.5 x 4.25 x 1.25 in	
BOOSTER WEIGHT	0.445 lbs	

Installation

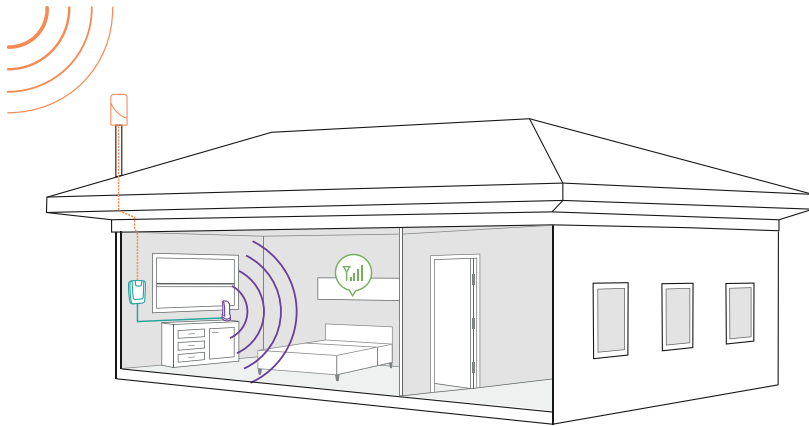

- 1 **Receives signal:** The powerful antenna reaches out to access a voice and 3G data signal, and delivers it to the booster.
- 2 **Boost signal:** The booster receives the signal, amplifies it, and serves as a relay between your phone and the nearest cell tower.
- 3 **Broadcasts signal:** Your devices get a stronger signal, and calls and data are fed through the booster back to the network.

Available Accessories

Optional Antenna Kits



Lightning Surge Protector 75 Ohm
859992[†]



RG-6 F-Male / F-Male, 2ft White Cable
950602[†]



20 ft. White RG6 Low Loss Coax
950620^{*}




F-Female to F-Female Barrel Connector
971129^{*}




Inside Antenna Upgrade Kit
304447^{*}

Package Dimensions


14.25 L x 5.25 W x 11 H



FRONT



SIDE



TOP/BOTTOM



WEIGHT

MASTER CARTON: 25 L x 18 W x 16 H | 33 lbs.

Support



2 Year Warranty from Purchase.

Website: <http://support.weboost.com>

Phone: +1 866 294 1660

Monday to Saturday

FOR PARTNER'S USE

***⚠️ WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

[†]**⚠️ WARNING:** This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

UPC

HOME 3G



8 11815 02457 6